



A&T[™]



VB 200

4K ePTZ CONFERENCE
VIDEO SOUND BAR

Applications: Conference room



4K ePTZ CAMERA



AUTO FRAMING




SPEAKER



FOV 110°



USB PLUG & PLAY

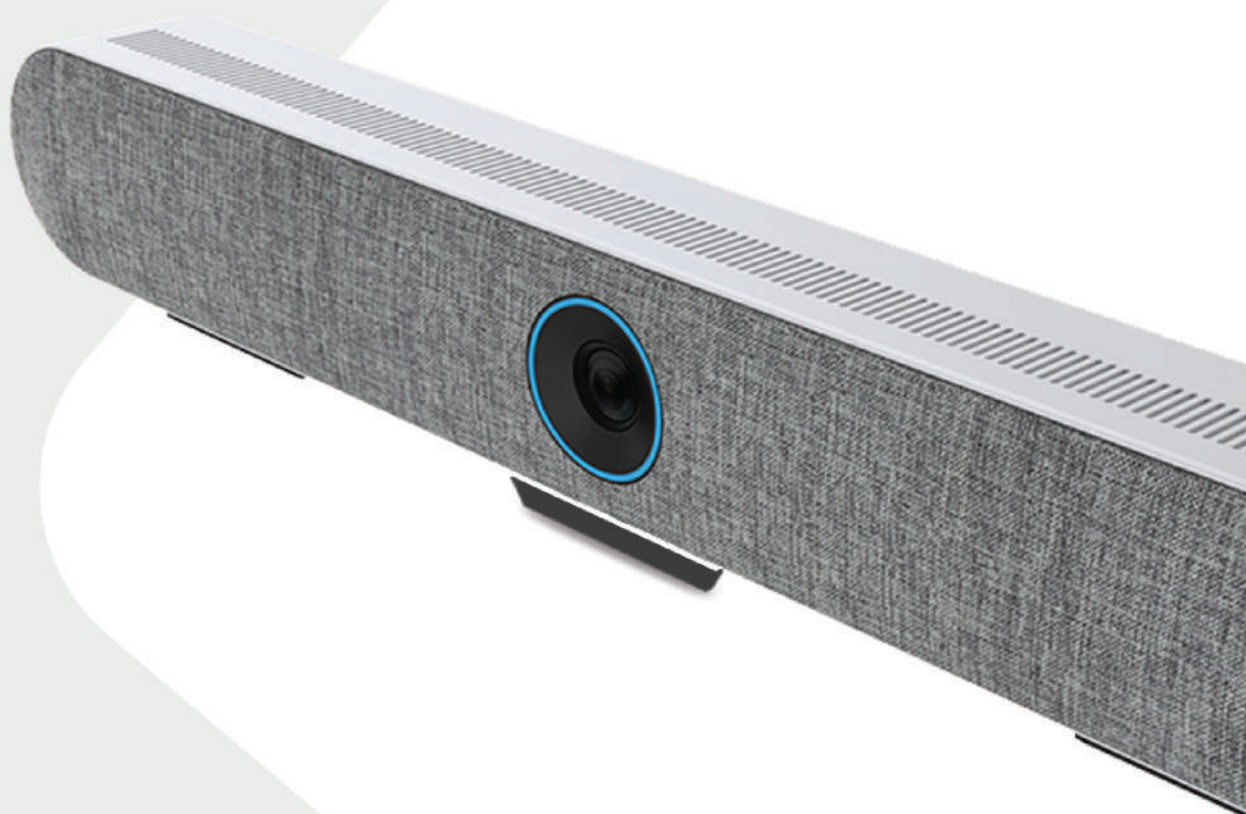

VB 200

SPECIFICATION



Camera

| | |
|----------------------------|---|
| Video | 4K Camera |
| Sensor | 1/2.5", 8.5M Pixels CMOS Sensor |
| Filed of View | Fixed Focus.110° |
| Zoom | Digital Zoom 5X Support EPTZ |
| Support 3D Noise Reduction | Yes |
| Video Format | 3840 x 2160 @30FPS 1920 x 1080 @30FPS 1280 x 720 @30FPS |

Integrated Audio

| | |
|--------------------|--|
| Speaker | 20W Speaker output |
| Microphone | 4 Microphone |
| Frequency Response | 100Hz - 24000Hz |
| Sensitivity | 94dB SPL@1KHz |
| SNR | 65dB |
| Other Features | Echo Cancellation, Dynamic Noise Reduction, Full Duplex HD call, 180 Degree Pick-up Range and inbuilt DSP Audio Processing |

Other Functions

| | |
|----------|---------------------------------|
| Features | AI smart zoom tracking function |
| Protocol | UVC (USB Video Class) |

Interfaces

| | |
|---------|--------------------------------|
| USB | USB 3.0 Type-B |
| Power | DC Power Supply |
| Network | RJ45 - 10/100 Mbps |
| Others | Kensington anti-theft lockjack |

Physical Parameters

| | |
|-----------------------|---|
| Product Size | 603mm x 93mm x 74mm |
| Power Supply | DC 12V/2A@100~240VAC, 50/60Hz |
| Operating Temperature | 0° ~ 40° |
| Storage Temperature | -10° ~ 70° |
| Working Immunity | 5 ~ 95% Condesation Free |
| Supported OS | Windows 8 / Windows 7 / Windows 10 MAC OS X 10.7 and Above |