

A&T
INTERACTIVE
TOUCH DISPLAY

Applications: Smartclass Room | Training Room | Conference Room



4K ULTRA HD



WIRELESS SCREEN SHARING



ANDROID



WHITE BOARD



MULTI TOUCH



INTERACTIVE TOUCH DISPLAY SPECIFICATION



Model	IFP65T	IFP75T	IFP86T	IFP98T
Size	65"	75"	86"	98"
Panel Type	IPS Ultra HD	IPS Ultra HD	IPS Ultra HD	IPS Ultra HD
Backlight Type	D-LED	D-LED	D-LED	D-LED
Panel Resolution	3840*2160 (px)	3840*2160 (px)	3840*2160 (px)	3840x2160(px)
Brightness (typ)	400cd/M ² (typ.)	400cd/M ² (typ.)	400cd/M ² (typ.)	400cd/M ² (typ.)
Contrast Ratio (typ)	4000:1	4000:1	4000:1	1200:1(typ.)
Response Time (ms)	6ms (typ.)	8ms (typ.)	8ms (typ.)	8ms (typ.)
Aspect ratio	16:9	16:9	16:9	16:9
View Angle	178° (H) / 178° (V)	178° (H) / 178° (V)	178° (H) / 178° (V)	178°(H) / 178°(V)
Life Time	> 50,000 hrs	> 50,000 hrs	> 50,000 hrs	> 30,000 hrs
View Area	1428.48mm x 803.52mm	1647.36mm x 926.64mm	1895.04mm x 1065.96mm	1649.6mm x927.936mm
Touch Technology	Advanced Infra-red			
Glass	Anti-Glare			
No.of Touch Point	20 Points (Android)			40 Points (Android)
Tempered glass	4mm Toughened Glass			3.2mm Toughened Glass
Touch Accuracy	+1mm			90% (+1mm)
Frame Material	Aluminum / Plastic			
Response Time	<10ms			
Light Resistance	Available			
Touch Frame Electrical Characteristics	Connect type-male USB 2.0, Communication type-male USB2.0 (Full Speed), Power Supply - USB power, Voltage-DC+5V+5%			
Mother Board	Quard Core, ARM Cortex A55*4,1.8Ghz, RAM/ROM 8GB/64GB, Wi-Fi-802.11 a/b/g/n Dual band 5GHz			4 A73(Quad core A73)+4 A53 Quad core A53) RAM/ROM 8GB/64GB
Operating System	Built-in System - Android 13			
Special Feature	Versatile Annotate - Yes (all Pages), Screenshot, Gesture Eraser, Smart Writing App			
Interface	HDMI IN*3,DP*1, Android USB 3.0*1 Android USB 2.0*1 , Public USB3.0*3, TOUCH USB*4, TYPE-C*1, LAN *2, SPDIF*1, OPS PORT*1, RS232 IN *1, Audio-Out*1, MIC IN*1			TOUCH-USBx3, LAN(Ethernet)x2, OPS Slot*1, USB2.0x1, USB3.0x3, HDMI 2.0 INx2, DPx1, TYPE-Cx1, AV INx1, AV Outx1, VGA INx1, PC-AUDIO INx1, HDMI OUTx1
Power	Voltage-100 V~240 V/AC, 50/60 Hz, Power(AC) Input x1, Stanby (Watt)-<0.5W			
	170W	400W	440W	
Speaker	Audio Out Power-15W*2 8 ohms			
Environment	Working Temperature 0°C ~ 40°C, Storage Temperature - 10°C ~ 60°C, Working Humidity - 20% ~ 80% RH Non-Condensing, Storage Humidity-10% ~ 60% RH Non-Condensing, MAX Working time (Hour / Day) - 18/7			
Accessories	Remote Control x1, Power Cord x1(3m), USB Cable x1(3m), HDMI Cable x1(3m), Touch Pen x2, User Manual, Warranty Card, Wall Mount			


+91 452 4392222

sales@atnetindia.net

www.atnetindia.net

INTERACTIVE TOUCH DISPLAY SPECIFICATION

SCREEN SHARE

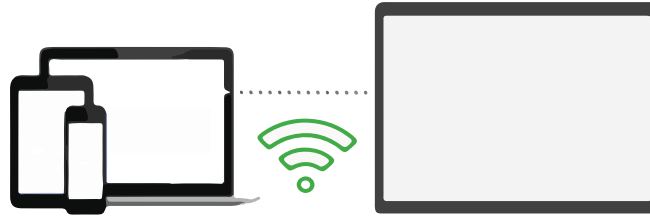

Incorporated With the exclusive K-Share app for wireless presentation and collaboration through screen mirroring on Android, IOS and windows devices

Network Connect



Two many mirror
& collaborate

Install K-Share



Wireless mobile camera
access to display

Connect & Share



Remote Control

OPTIONAL PRODUCTS



OPS-Mini-PC



Movable Stand



+91 452 4392222

sales@atnetindia.net

www.atnetindia.net