




AVX 3.2

USB & HDMI
Camera Switcher & Mixer

Applications : Meeting Room, Lecture Room, Web - cast




**CAMERA
SWITCHER**



**CAMERA
MIXER**



**FLEXIBLE
LAYOUT**



**PLUG &
PLAY**




AVX 3.2

SPECIFICATION



Parameters

Video Input	1x USB 3.0, 1x USB 2.0, 1x HDMI 1.4
Video Input Resolution	HDMI: 1920x1080@60Hz, 1280x720@60Hz USB3.0: 1920x1080@30Hz, 1280x720@30Hz etc. USB2.0: 1920x1080@30Hz, 1280x720@30Hz etc.
Video Output	1x USB3.0 Type-C, 1x HDMI
Video Output Resolution	HDMI : 3840x2160@60Hz, 3840x2160@30Hz, 1920x1080@60Hz, 1280x720@60Hz Type C: 1920x1080@30Hz, 1280x720@30Hz etc.
Format Compliance	HDMI1.4, HDCP1.4
Audio	1x analog out, line level 3.5mm jack 1x analog in, line level 3.5mm jack
Control options	Integrated Buttons, LAN, USB HID, RS-232
IP interface	1x 1000Mbps, POE option (802.3af)
Dimension	180mm x 95mm x 18mm
Operating Temperature	0° C to +45° C
Storage Temperature	0° C to +60° C
Relative humidity	20%~ 85% RH (no condensation)
DC Power	12V
Power Consumption	15W(MAX)
Power adapter	AC100~240v 50/60Hz 12V/1.5A

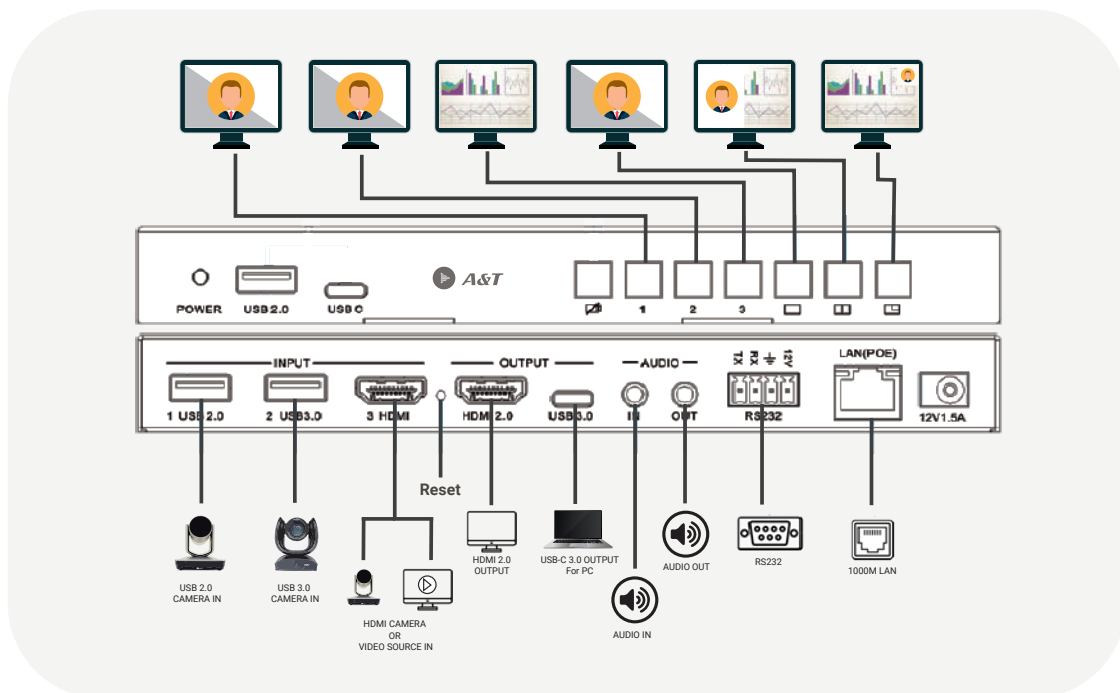

+91 452 4392222

sales@atnetindia.net

www.atnetindia.net

CONNECTING YOU **ACROSS SPACE AND TIME**