



A&T™



SNAP U2

YOUR POCKET CAMERA REDESIGNED.




USB Video Conference Camera

The Snap U2 is a portable full HD pocket camera that is compatible with all video conferencing applications. This easy to mount and use web camera comes with a powerful wide angle lens that covers all participants in a small meeting room or huddle room

Work from Home | Tele Consultation | Teach from Home

Add a touch of realism

Extraordinary Video Conferencing Experiences

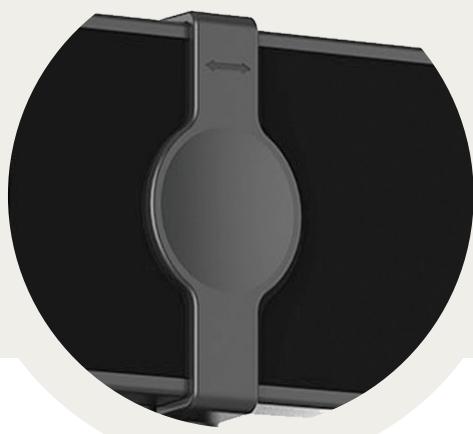

Privacy Cover (Optional)

Prevent hackers from misusing your device or unintentional switching on of the camera

Built-in Microphones (Optional)

Capture every spoken word so you deliver crisp audio without background disturbances



R-61002399
www.bis.gov.in



MAKE IN INDIA



SNAP U2

SPECIFICATION



| Ordering Information | | SNAP U2 | | |
|-----------------------|---|--|------------------------------------|-------------------------------|
| Web Camera | 10102823SE | 10102621SE | 10102923SE | 10102124SE |
| Camera | | | | |
| Main IC | | | | |
| Image Sensor | 1/3 Inch 2.1 Megapixel sensor | 1/3 Inch 2.1 Megapixel sensor | 1/3 Inch 2.1 Megapixel sensor | 1/3 Inch 4 Megapixel sensor |
| Resolution | 720p | 1080p | 1080p | 1080p |
| Digital Zoom | NA | NA | NA | NA |
| Lens | f= 2.2mm | f= 2.2mm | f= 2.2mm | f= 2.2mm |
| FOV | 75° | 75° | 75° | 75° |
| Auto / Fixed Focus | Fixed Focus | Fixed Focus | Auto Focus | Fixed Focus |
| Audio & Video | | | | |
| Resolution | 1280 x 720 | 1920 x 1080 | 1920 x 1080 | 1920 x 1080 |
| Video image format | YUV2 / MJPEG / H.264 | | | |
| Frame Rate | 30 fps | 30 fps | 30 fps, 60 fps | 30 fps |
| Image Processing | Support 3D denoising, Automatic white balance, Auto Exposure, Auto Compensation, Automatic gain and other image processing algorithms | | | |
| Mic | Yes (Optional) | Mic - Pickup upto 1M | Mic - Pickup upto 1.5M | Mic - Pickup upto 1.5M |
| Noise Suppression | Yes | Yes | Yes | Yes |
| Other Features | Manual Rotation | Privacy cover 360° Manual Rotation | Privacy cover 360° Manual Rotation | 360° Manual Rotation |
| Mounting Options | Monitor Mount | Monitor Mount | Monitor Mount | Monitor Mount |
| Interface | | | | |
| USB | USB 2.0 interface, 1.5M cable | USB 2.0 interface, 1.5M cable 2M cable (Optional) | USB 2.0 interface, 1.5M cable | USB 2.0 interface, 1.5M cable |
| Physical Parameters | | | | |
| Weight (g) | 92g | 110g | 110g | 110g |
| Dimensions(L*W*H) | 75mm x 105mm x 33mm | | | |
| Power Supply | Power by USB | | | |
| Operating Temperature | -10° ~ +40°C | | | |
| Working Humidity | 10% – 90% | | | |
| Applications | | | | |
| Operating System | Windows, Mac & Linux | | | |
| Enterprise | Video Conference & Live webcast | | | |
| Medicine | Tele-medicine & Tele-consultation | | | |
| Education | Online Classes & Lecture Capture | | | |

+91 452 4392222

✉ sales@atnetindia.net

www.atnetindia.net

• EXPERIENCE NEXT