

AIR 200

WIRELESS
SPEAKERPHONE



User Manual



EXPERIENCE nCXT

Overview

The portable speaker phone is the high-quality Internet phone conference call device connected with computers and other intelligent devices. It is provided with the latest generation of voice processing algorithm of acoustic echo cancellation and environmental noise reduction. Its voice quality of the call is clear and natural. Its body is light and the device and cable are integrated, which is easy to carry, install and operate. It is suitable for computer internet phone conference call and other application scenarios.

Packing list



Speakerphone




USB Cable




USB Dongle

Product information

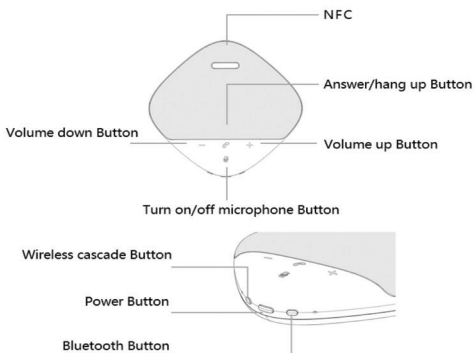

Connectivity

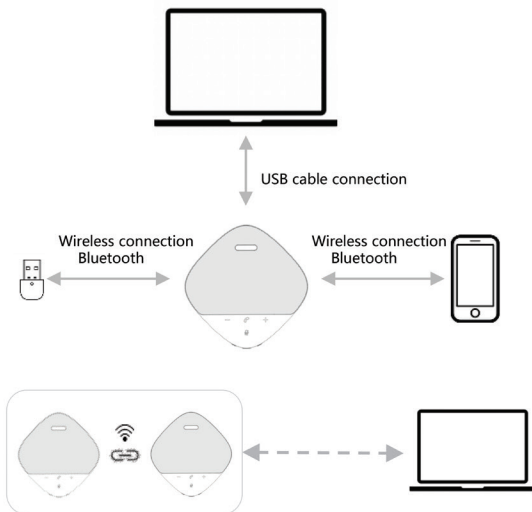

NFC Connectivity



Wireless Settings / Status

Status	Operation	Description
How to connect the USB Dongle?	1. Insert the USB Dongle into the front USB port of the display device 2. Press and hold the Bluetooth button of the wireless omnidirectional microphone device for 5-7s to enter the Dongle pairing mode	Pairing: flashing blue light Pairing successful: blue light is always on
How to turn off bluetooth?	Long press the bluetooth button for 2s	Turn off bluetooth: white light is always on

Status	Actionable	Description
How to turn on wireless cascade?	Long press the cascade button for 2s to enter the wireless cascade pairing	Pairing is successful: the green light is always on
How to turn off the wireless cascade pairing?	Long press the cascade button for 2s	Disconnect the wireless cascade connection.
How to disconnect after bluetooth connected device?	Long press the bluetooth button for 2s	Disconnect bluetooth: blue light flashes.
Other functions of bluetooth button	Click the bluetooth key	play/pause music

2. Application of Bluetooth wireless connection (only applicable to Bluetooth

version):

2.1 After the Bluetooth wireless connection of the host is successful, the instant messaging or Internet phone application software in the computer can be used. The Internet phone conference can be carried out according to the operation method of the application software.

2.2 When the host is connected with the mobile phone through Bluetooth, in addition to the normal calling, answering or ending of call with the mobile phone, it can also short press the "Power ON /OFF" key of the host to answer the incoming call or long press the "Power ON /OFF" key of the host to end a call.

2.3 Speaker volume adjustment: during a call, press the "Volume decrease" key of the host to gradually decrease the speaker volume to the minimum (Continuous flashing green light means mute speaker); and press the Volume increase key to gradually increase the speaker volume to the maximum.

2.4 Microphone pickup and mute: during a call, the microphone is in the pickup state by default. When press the "Microphone mute" key of the host, the status indicator will be red, indicating that the microphone is mute. Press this key again to turn off the red indicating that the microphone pickup is restored.

2.5 When the status indicator flashes in orange, it will keep reminding you that the built-in battery is low. Please plug it into the USB power port for charging.

2.6 When charging, the indicator will be red, and when the built-in battery is fully charged, the red will go out.

2.7 Bluetooth connection is preferred when both of USB wired connection and Bluetooth wireless connection are available.

Points for attention

1. You can't connect multiple Cameras or Speakerphones to the computer intelligent device at the same time, including the native device, or else, a squeak may appear during the call.
2. It is required to connect the USB cable directly to the USB interface of the computer device. It may cause operation problems if it is connected through the USB hub.
3. Check whether the device driver is installed and connected successfully: check whether the default device displays "native device model" in the options of playback (output) and recording (input) of the sound and audio device properties of the computer control panel option, if not, re-select "Native device model" and confirm.
4. When use, it can adjust the volume through the speaker option on the computer if necessary. When using instant messaging or Internet phone application software, please set the device of the model as the preferred audio device. Do not repair the device by yourself, or else, it may cause electric shock. Please contact your seller if there is any problem needing repair.

Manufactured in India by



A&T

EXPERIENCE NEXT

A&T Video Networks Private Limited ®

Service and Support:

support@atnetindia.net
1800-425-5847